

15° BNS Wire Coil



Yellow Zinc Coated – Flat Head


Part Number	Length	Diameter	Head	# / Case	Cases/ Skid
WCNS134113YZPH	1¾"	.113	#2 PH	3,600	56
WCNS200113YZPH	2"	.113	#2 PH	3,600	56
WCNS200113YZSQ	2"	.113	#2 SQ	3,600	56
WCNS214113YZPH	2¼" ★	.113	#2 PH	3,600	56
WCNS214113YZSQ	2¼" ★	.113	#2 SQ	3,600	56
WCNS212113YZPH	2½" ★	.113	#2 PH	3,600	56
WCNS212113YZSQ	2½" ★	.113	#2 SQ	3,600	56
WCNS300120YZSQ	3"	.120	#2 SQ	3,600	56
WCNS312131YZSQ	3½"	.131	#2 SQ	3,600	56



Great for Southern Yellow Pine applications! Harder Woods like Oak, Ash, etc. will increase Pull-Out Resistance of Ballistic NailScrews® dramatically. ★ IAPMO #0133

High Load Wire Coil Yellow Zinc Coated – Flat Head

Part Number	Length	Diameter	Head	# / Coil	# / Case	Cases/ Skid
WCNS200113YZSQH★	2"	.113	#2 SQ	900	3,600	56
WCNS214113YZSQH★	2¼" ★	.113	#2 SQ	900	3,600	56
WCNS212113YZSQH★	2½" ★	.113	#2 SQ	900	3,600	56

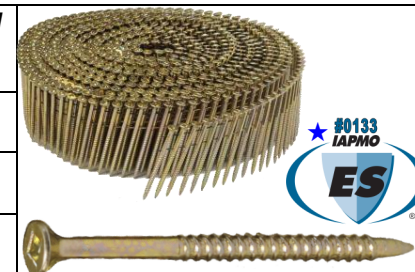

Special tools for mounting SUPER FAST! Any head insert, coating, or diameter can be special ordered given enough time and quantity. ★ IAPMO #0133 ★ Special Order Item Only

Drive them in;



Screw them out!™

**Over 75% Faster than Regular Screws
Over 50% Faster than Collated Screws**



1¾", 2", 2¼", 2½", 3", and 3½" are our most popular sizes for Crates, Pallets, and Concrete Forms. **"Green" Earth Friendly** applications for Ballistic NailScrews® are always welcome! Folks love to take out the NailScrews® and reuse the materials for other projects, even housing in some countries. **For best results, unscrew the BNS slowly.**

Be sure to use a large enough BNS to hold the weight of the crated items, we make 3½" x .131 for the big stuff.

2¼" x .113 Pull-out Resistance into Southern Yellow Pine averaged **525 lbs per BNS** and the shear value was **1,218 lbs.**

Reference: 2006 ICC ES Approved Testing Lab Intertek Report #3100366-001 for Ballistic NailScrews® (BNS)

See pages 78-79 for compatible nailers.