

15° BNS Wire Coil


PT2000® Flat Head – Dark Gray

Part Number	Length	Diameter	Head	#/Case	Cases/Skid
PTWCNS134113SQ	1¾"	.113	#2 SQ	800	96
PTWCNS200113SQ	2"	.113	#2 SQ	800	96
PTWCNS212113SQ	2½" ★	.113	#2 SQ	800	96
PTWCNS300113SQ	3" ★	.113	#2 SQ	800	96



For use with many types of wood including ACQ and all other treated lumber. Can also be used for light (12-16 gauges) steel applications. Works well with framing size tools. Perfect for steel studs and high wind areas. **Use the 2½"** where insulation is used between the siding and the framing materials.

★ IAPMO #0133

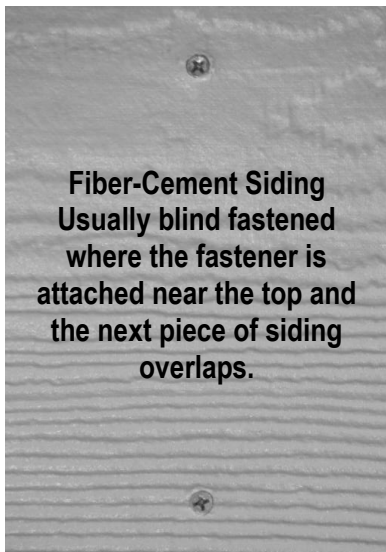

Fiber-Cement Siding Usually blind fastened where the fastener is attached near the top and the next piece of siding overlaps.

**Drive Them In;
Screw Them Out!™**



NSDCN75



DRAGONBOARD®



Test on scrap materials at 100-110 lbs of pressure at the tool. A depth of drive adjustment on the tool will make this easy!

See pages 78-79 for compatible nailers.