

15° BNS Plastic Sheet Coil

PPG1500™ Flat Head



Part Number	Length	Diameter	Head	Color	# / Case	Cases/ Skid	
HSNS112113PHG	1½"	.113	#2 PH	Gray	1,600	80	
HSNS112113T15C	1½"	.113	T-15	Cedar	1,600	80	

For use on Fiber-Cement Board, DragonBoard® (Fire Proof Board), etc. Can be used in 12-16 gauge Steel applications.

PPG1500™ Flat Head

Part Number	Length	Diameter	Head	Color	# / Case	Cases /Skid	
HSNS212113PSQC	2½"	.113	#1 SQ	Cedar	1,600	80	
HSNS212113PSQG	2½"	.113	#1 SQ	Gray	1,600	80	
HSNS212113PSQM	2½"	.113	#1 SQ	Mahogany	1,600	80	
HSNS212113PSQW	2½"	.113	#1 SQ	Walnut	1,600	80	

Use the 2½" where insulation is used between the siding and the framing materials.

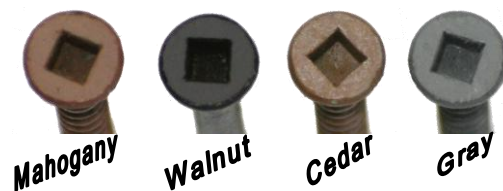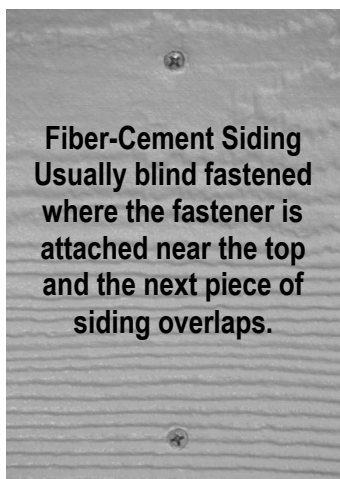

TIP Test on scrap materials at 100-110 lbs of pressure at the tool. A depth of drive adjustment on the tool will make this easy!

See pages 78-79 for compatible nailers.