

# Application: Fiberglass-Backed Gypsum Sheathing



## 15° BNS Plastic Sheet Coil

### Yellow Zinc Coated – Flat Head

Part Number	Length	Diameter	Head	# / Case	Cases/ Skid	
HSNS114113YZPH	1¼"	.113	#2 PH	3,600	56	
HSNS112113YZPH	1½"	.113	#2 PH	3,600	56	

Use Yellow Zinc coated Ballistic NailScrews® for interior applications where moisture is not present.


### PPG1500™ Flat Head

Part Number	Length	Diameter	Head	Color	# / Case	Cases/ Skid	
HSNS112113PHG	1½"	.113	#2 PH	Gray	1,600	80	
HSNS112113T15C	1½"	.113	T-15	Cedar	1,600	80	

Use PPG1500™ coated Ballistic NailScrews® where moisture may be present, treated lumber is used, and for many exterior applications.



Test on scrap materials at 100-110 lbs of pressure at the tool.  
A depth of drive tool adjustment will make this easy!

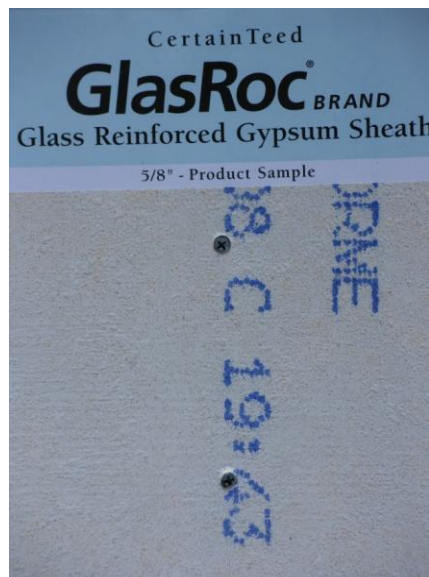

See pages 78-79 for compatible nailers.